


Below are guidelines to reference when developing your balloon experiment proposal. We encourage participation first and foremost - so remember that you won't be disqualified if your entry doesn't comply with every guideline. But if you do - your entry will score higher!

Experiment Cost

When developing your proposal, keep in mind that all purchased components to build your proposed experiment **should not exceed a total cost of \$1,500**. The judges are not requesting a budget, nor will any team be disqualified based on cost. Still, proposals that require additional funding or outside sponsorship beyond the \$1,500 prize value will score lower.

How Balloon Experiments Will Fly

A gondola frame will hang from the balloon and carry 30 experiments per flight. All experiments will have the opportunity to sense the atmosphere and capture images in two directions: 1) nadir: looking down to Earth's surface, and 2) horizontal: looking out to the horizon. The inflated balloon will block any upward views, so there will be no zenith views. Each experiment will be attached to the gondola, plugged into the balloon's power and data source, and insulated with foam sheets cut out with holes for any cameras or sensors that may be included in each experiment. Inserts will also be placed between each experiment to insulate each flight box further.

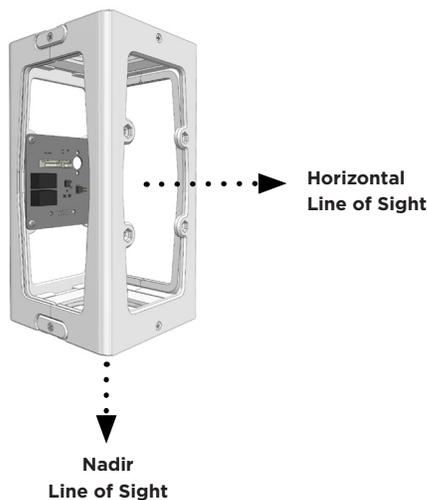

VEHICLE DATA (DATA STREAM) SENT TO EXPERIMENTS

Time
Latitude/Longitude
Altitude
Atmospheric Pressure
Course
Velocity XYZ

Flight Summary

The balloon will launch and ascend to an altitude of approximately 70,000 feet, where it will float for at least four hours. The flight crew will target a morning launch time with the following launch conditions:


- Minimal to no cloud cover
- No rain

The experiments can collect data during the balloon's ascent up to the float altitude and during the approximate four-hour float time. During flight, the balloon will traverse land features such as trees, fields, farms, and bodies of water (e.g., rivers, reservoirs, or lakes). At the end of the float time, power will be shut off, data collection will stop, and the experiments will parachute down to the ground.

High-Altitude Balloon Experiment 2022-23 DESIGN GUIDELINES



FLIGHT PROFILE

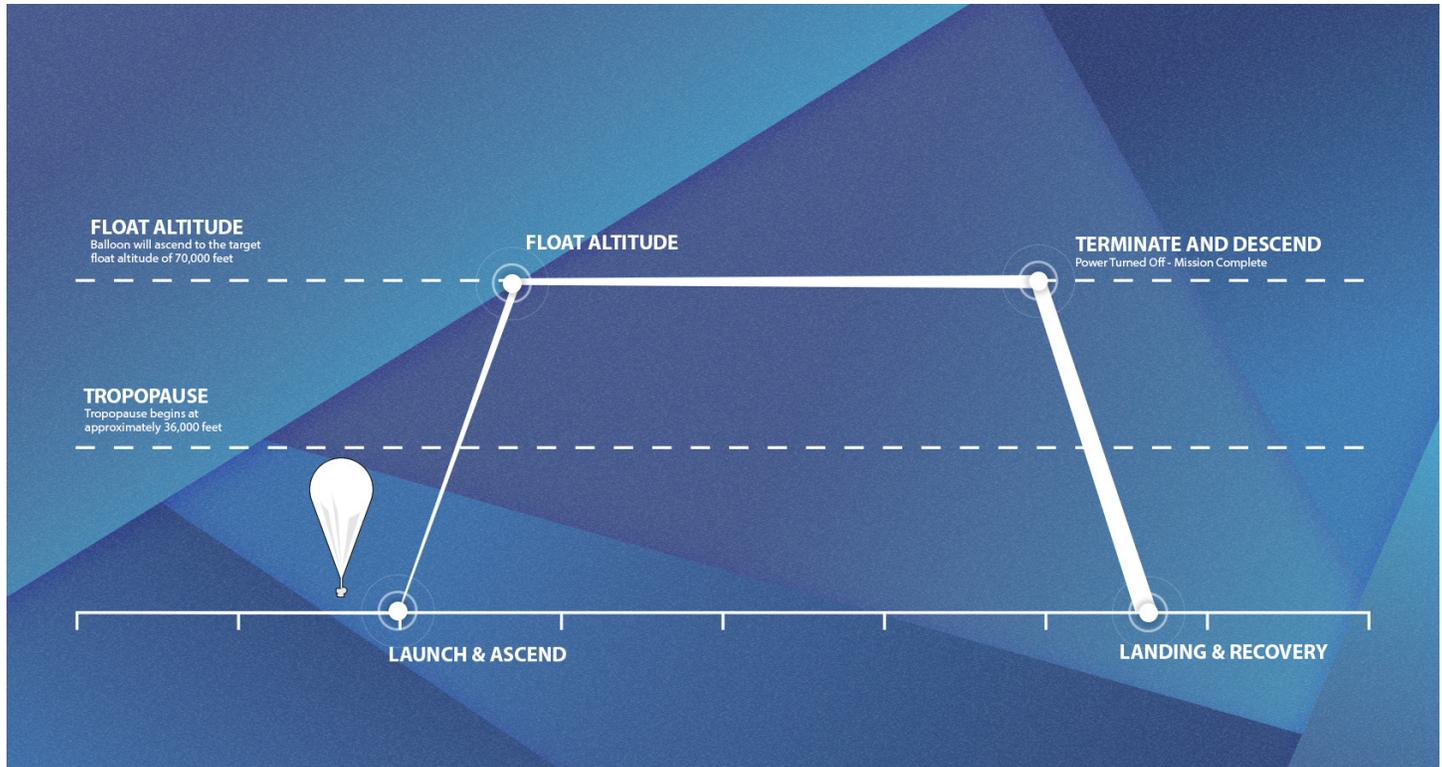

EXPERIMENT FLIGHT BOX

Winning teams will receive a flight box and a technical development guide to prepare for their balloon flight.

Maximum Size: 4 x 4 x 8 in (10 x 10 x 20 cm)
Total Maximum Weight: 2.2 pounds (1 kg)



FLIGHT PROFILE DETAIL


Prepare for Launch	Flight experiments will be powered on and readied for flight. Target launch time is in the morning.
Launch & Ascent	Experiments will ascend through the troposphere for approximately 1 hour. During this time, experiments will be powered-on and can collect data.
Float Altitude	Upon reaching the target altitude of approximately 70,000 feet, the experiments will float and gather data for at least 4 hours.
Termination & Descent	After 4+ hours at float altitude, power to the experiments will be turned off, the balloon will release from the gondola, a parachute will deploy and the experiments descend.
Landing & Recovery	Experiments land, the location is tracked, and best efforts will be made to recover the experiments and mail them back to teams.

SAMPLE FLIGHT VIDEO




ABOUT HIGH-ALTITUDE BALLOONS





MASS

Your entire balloon experiment, including the flight box, screws, electronics, and all components inside, can weigh no more than 1 kilogram (2.2 pounds). The flight box provided to winners will weigh about 230 grams, leaving your team with about 770 grams left for accommodating your experiment.




SIZE / VOLUME

Winners will be sent a flight box 4 x 4 x 8 inches in size. When brainstorming your design, it is essential for your experiment idea to fit within this volume. The flight box will also have mounting points available on each side, which can be used to attach different experiment components.




POWER & DATA

Your experiment will be plugged into the balloon for power and data. Flight data will be sent in a serial format that can easily be received by a microcontroller through UART and interpreted as strings of text and numeric data. Experiments will receive 9V / 1.5 A power from the balloon during flight. Future Engineers mentors will help advise on power and data if selected as a winner.



ATMOSPHERIC SENSING

Your experiment will be exposed to the ambient atmospheric temperature and pressure during flight. If using sensors to measure atmospheric conditions, it is recommended to mount sensors as close to the outer face of the experiment as possible.



ACCELERATIONS

Your experiment should be designed to withstand 6 g in any direction. Balloons are generally known for their gentle, smooth rides, but there are two main points during flight to keep in mind when thinking about accelerations (or decelerations). The first is when the parachute deploys, and the second is when the gondola lands on the ground.



TEMPERATURE

Temperatures during balloon flights could range between 5 degrees C and -82 degrees C. However, we don't advise designing for -82C! Please design for a cold flight, but also know that there is time to refine your component selections during the experiment build period. Future Engineers will help advise on insulation and temperature management strategies if selected as a winner.




LASER SAFETY

For safety, lasers will not be allowed, including laser-transmitting technologies, such as LIDAR. However, exceptions will be made for commercial sensors that use internal lasers to detect particles or gather other data (e.g., PM or air quality sensors), so long as students are not directly interacting with a laser and a laser does not transmit outside of the experiment.



NO BATTERIES

Your experiment will be plugged into the balloon for power. Please design your experiment to operate solely using the balloon's power. By relying on balloon power, a battery is less likely to lose its charge before or during flight. If you want to use a typically battery-powered component, we recommend hard-wiring if possible.




NO BLUETOOTH / WIFI / RF

Radiofrequency (RF) transmissions are NOT allowed on NASA TechRise experiments. This means no Bluetooth, Wi-Fi, cellular phone, or RF communications.



LIQUIDS


Experiments can have no more than 150 ml of non-hazardous liquid.



NO BIOLOGICAL MATERIALS

Experiments that grow or monitor LIVE organisms, including plant, animal, or cellular-focused experiments are not allowed. (Unintentional bacteria/germs are fine.) Exceptions are seeds on their own, soils, or artificial soils for space farming-related experiments, and substances such as yeast that remain dormant until activated.

***Updated 10/18/2022 to include yeast.**



MAGNETS

Experiments that propose magnets are allowed, but the magnets cannot adversely impact, affect or alter the neighboring experiments around it. You should assume that another experiment will be directly adjacent to your experiment.